

BTP-M280

Dot-Matrix Receipt Printer

SNBC

Extraordinary
Value!

The lowest cost high quality POS printer available.




PRELIMINARY




Proven impact printing technology preferred for POS kitchen printer applications.

- 4.7 Lines per Second Print Speed
- Drop and Print Paper Loading
- Built-in Wall Mount Standard
- Stores/Prints Logo Images
- Built-In USB Interface
- Serial, Parallel, Ethernet or WLAN Interface Boards Available



BTP-M280

Dot-Matrix Receipt Printer

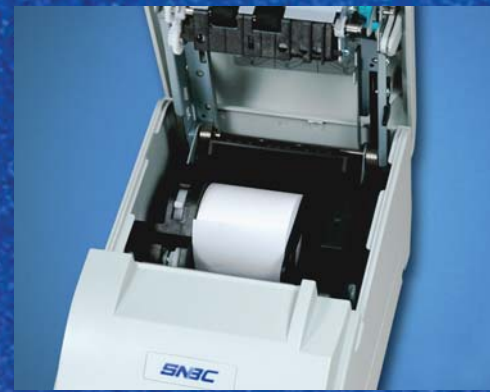

Drop and Print Paper Loading
Built-in Paper Width Selector



BTP-M280A Features Paper Take-Up
Optional Power Supply Cover



Built-In Wall Mount Bracket
Optional Audio/Visual Print Messenger



Easy to Change Interface Modules

Additional Features

- 18,000,000 Lines MCBF
- Paper-End Sensor
- Uses 80±0.5mm, 76±0.5mm, 69.5±0.5mm, 57.5±0.5mm 1 or 2-Ply Paper Rolls
- Interface Cable Included
- Power Supply, Paper Roll, Ribbon Cartridge, Cable, CD with Drivers, Quick Start Guide Included

Specifications

Maximum Print Speed:	4.7 Lines per Second
Printing Method:	9-Pin Serial Impact Dot-Matrix
Printing Direction:	Bi-Directional
Memory:	1M Flash
Characters Per Line:	Font A: 33; Font B: 40
Characters Size:	Font A: 9 x 9; Font B: 7 x 9
Paper Type:	Width: 76 / 69.5 / 57.5; Max Diameter: 83.0mm
Paper Supply:	Drop and Print
Reliability MCBF:	18,000,000 Lines
Cutter Life:	1,500,000 Cuts
Character Set:	Alphanumeric: 95 International: 32
Extended Graphic:	128 x 8 Page
Compatibility:	ESC/POS™
Interface:	Serial/USB, Parallel/USB
Driver:	Windows 98 / NT4.0 / 2000 / 2003 / XP / VISTA
Drawer Port:	2 Port (+24VDC) with Drawer Compulsion
Data Buffer – Receive Buffer:	8 KB RAM
NV Bit Image Data:	128 KB
User NV Memory:	8 KB
Power Supply:	AC 100 ~ 240 V, 50/60 Hz Adapter Included
Current/Power Usage:	1.5A / 36W
Operating Temperature:	40° ~ 114°F (5° ~ 45°C)
Operating Humidity:	20% ~ 90% RH (Non-Condensing)
Dimensions:	9-5/8"L x 6-5/16"W x 5-11/16"H
Shipping Weight:	11 lbs.
EMC – Safety:	FCC, UL, CUL, CE, CB, GS
Options:	Print Messenger, Power Supply Cover

All product features are subject to change without notice.
Company and product names are trademarks or registered trademarks of their respective companies.